


High Pressure Multispiral Hydraulic Yüksek Basıncılı Spiral Çelik Telli Hidrolik

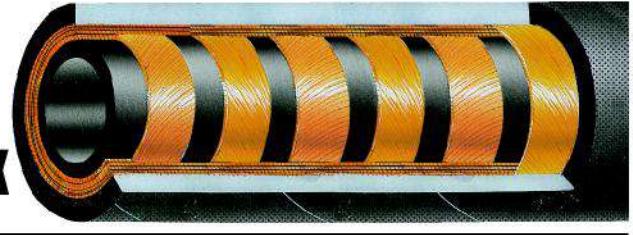

UK TUBE : MINERAL, VEGETABLE, HYDRAULIC OILS AND GLYCOL BASIS FLUIDS RESISTANT SPECIAL SYNTHETIC RUBBER.
REINFORCEMENT : 4 OR 6 HIGH TENSILE STEEL SPIRALS.
COVER : HYDRAULIC OIL, ABRASION AND WEATHER RESISTANT SYNTHETIC RUBBER
APPLICATION : FOR HYDRAULIC SYSTEMS WITH HIGH PEAK PRESSURES AND ARDUOUS CONDITIONS OF OPERATIONS.

DE SEELE : SPEZIELLER SYNTHETISCHER GUMMI, BESTÄNDIG GEGEN MINERAL - UND BIOLOGISCHE ÖLE.
EINLAGEN : 4 ODER 6 HOCHZUGFESTE STAHLDRAHTSPIRALEN.
DECKE : ÖL-, OZON- UND WITTERUNGSBESTÄNDIGER, ABRIEBFESTER SYNTHETISCHER GUMMI.
ANWENDUNG : GEEIGNET FÜR HYDRAULIKSYSTEME MIT HOCHDRUCK IN SCHWEREN ARBEITSUMGEBUNGEN.

IT SOTTOSTRATO : GOMMA SPECIALE SINTETICA RESISTENTE AI FLUIDI IDRAULICI CON BASE DI OLIO MINERALE E GLICOLI.
RINFORZO : 4 O 6 SPIRALI IN ACCIAIO AD ALTISSIMA RESISTENZA.
COPERTURA : GOMMA SPECIALE SINTETICA RESISTENTE AGLI OLI, ABRASIONE ED AGENTI ATMOSFERICI.
IMPIEGO : PER IMPIANTI CON PICCHI DI PRESSIONE SUPERIORE ALLO STANDART.

TR ALT KAT : MİNERAL, NEBATİ VE GLİKOL BAZLI HİDROLİK YAĞLARA DAYANIKLI ÖZEL SENTETİK KAUÇUK.
TAKVİYE : 4 VEYA 6 KAT ÇOK YÜKSEK MUKAVEMETLİ SİRAL ÇELİK TEL.
ÜST KAT : YAĞLARA, AŞINMAYA VE HER TÜRLÜ HAVA ŞARTLARINA DAYANIKLI SARGILI ÖZEL SENTETİK KAUÇUK.
KULLANIM YERİ : ÇOK YÜKSEK PİK BASINÇLARA VE ZOR ŞARTLARA MARUZ KALACAK HİDROLİK SİSTEMLERDE.

ID/iç		OD/DÇ		WP/ÇB		BP/PB		BR/KY/r		W/A		L/B	
inch	mm	mm	mm	BAR	PSI	BAR	PSI	mm	gr/mt			mt	
3/4"	19	32	32	345	5003	1380	20010	240	1675			Max. 61	
1"	25.4	38.4	38.4	345	5003	1380	20010	300	2130			Max. 61	
1 1/4"	31.8	49.3	49.3	345	5003	1380	20010	420	3975			Max. 61	
1 1/2"	38.1	57.3	57.3	345	5003	1380	20010	500	4985			Max. 61	
2"	50.8	71.6	71.6	345	5003	1380	20010	630	6510			Max. 61	

COVER : (U.S. MSHA APPROVED)
DECKE : (U.S. MSHA BESTÄTIGT)
COPERTURA : (U.S. MSHA CERTIFICATO)
ÜST KAT : (U.S. MSHA ONAYLI)



-40°C / +120°C
-40°F / +248°F

RoATSA

NORMS	EN 856 R13	MARKING	TRANSFER	COLOUR	
NORMEN	SAE 100 R13	BESCHRIFTUNG	EMBOSSED	FARBEN	
NORME	TSE 10548	MARCATURA	INK JET	COLORI	
NORMLAR	ISO 1307	MARKALAMA		RENKLER	

