


## High Pressure Multispiral Hydraulic Yüksek Basıncılı Spiral Çelik Telli Hidrolik



TUBE : MINERAL, VEGETABLE, HYDRAULIC OILS AND GLYCOL BASIS FLUIDS RESISTANT SPECIAL SYNTHETIC RUBBER.  
REINFORCEMENT : 4 OR 6 HIGH TENSILE STEEL SPIRALS.  
COVER : HYDRAULIC OIL, ABRASION AND WEATHER RESISTANT SYNTHETIC RUBBER  
APPLICATION : FOR HYDRAULIC SYSTEMS WITH HIGH PEAK PRESSURES AND ARDUOUS CONDITIONS OF OPERATIONS.

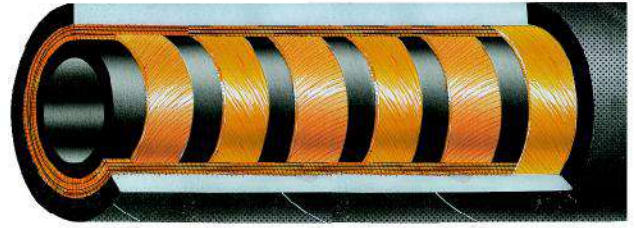

SEELE : SPEZIELLER SYNTHETISCHER GUMMI, BESTÄNDIG GEGEN MINERAL - UND BIOLOGISCHE ÖLE.  
EINLAGEN : 4 ODER 6 HOCHZUGFESTE STAHLDRAHTSPIRALEN.  
DECKE : ÖL-, OZON- UND WITTERUNGSBESTÄNDIGER, ABRIEBFESTER SYNTHETISCHER GUMMI.  
ANWENDUNG : GEEIGNET FÜR HYDRAULIKSYSTEME MIT HOCHDRUCK IN SCHWEREN ARBEITSUMGEBUNGEN.



SOTTOSTRATO : GOMMA SPECIALE SINTETICA RESISTENTE AI FLUIDI IDRAULICI CON BASE DI OLIO MINERALE E GLICOLI.  
RINFORZO : 4 O 6 SPIRALI IN ACCIAIO AD ALTISSIMA RESISTENZA.  
COPERTURA : GOMMA SPECIALE SINTETICA RESISTENTE AGLI OLI, ABRASIONE ED AGENTI ATMOSFERICI.  
IMPIEGO : PER IMPIANTI CON PICCHI DI PRESSIONE SUPERIORE ALLO STANDART.



ALT KAT : MİNERAL, NEBATİ VE GLİKOL BAZLI HİDROLİK YAĞLARA DAYANIKLI ÖZEL SENTETİK KAUÇUK.  
TAKVİYE : 4 VEYA 6 KAT ÇOK YÜKSEK MUKAVEMETLİ SİRAL ÇELİK TEL.  
ÜST KAT : YAĞLARA, AŞINMAYA VE HER TÜRLÜ HAVA ŞARTLARINA DAYANIKLI SARGILI ÖZEL SENTETİK KAUÇUK.  
KULLANIM YERİ : ÇOK YÜKSEK PİK BASINÇLARA VE ZOR ŞARTLARA MARUZ KALACAK HİDROLİK SİSTEMLERDE..

ID/iÇ		OD/DÇ		WP/QB		BP/PB		BR/KY/r		W/A		L/B	
inch	mm	mm	BAR	PSI	BAR	PSI	mm	gr/mt	mt				
3/8"	9,5	21,2	420	6090	1680	24360	150	765	> 3				
1/2"	12,7	24,4	420	6090	1680	24360	200	910	> 3				
5/8"	16,0	28,7	420	6090	1680	24360	235	1340	> 3				
3/4"	19,0	32,0	420	6090	1680	24360	265	1545	Max. 61				
1"	25,4	38,4	420	6090	1680	24360	330	2145	Max. 61				
1 1/4"	31,8	49,3	420	6090	1680	24360	445	3975	Max. 61				
1 1/2"	38,1	57,3	420	6090	1680	24360	530	4985	Max. 61				

COVER : (U.S. MSHA APPROVED)  
DECKE : (U.S. MSHA BESTÄTIGT)  
COPERTURA : (U.S. MSHA CERTIFICATO)  
ÜST KAT : (U.S. MSHA ONAYLI)



-40°C / +120°C  
-40°F / +248°F

## RoATSA

NORMS	EN 856 R15	MARKING	TRANSFER	COLOUR	
NORMEN	SAE 100 R15	BESCHRIFTUNG	EMBOSSED	FARBEN	
NORME	TSE 10548	MARCATURA	INK JET	COLORI	
NORMLAR	ISO 1307	MARKALAMA		RENKLER	