


# PVC HOSES







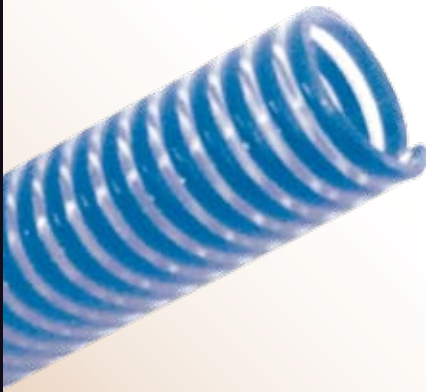

OUR QUALITY APPROVED BY THE WORLD

## SUCTION SDL



**Construction:**  
Strong, flexible and smooth plasticized PVC.

**Application:**  
For light duty suction and delivery of water, light chemicals; in agricultural, industrial applications and constructions







 ID (Inch)	 OD (mm)	 PSI	 VACUUM Inch.Hg	 Mind Bend Radius (mm)	 Mt
2"	57	80	29	160	50
3"	86	70	29	250	50
4"	115	65	29	400	30
6"	169	55	29	800	30

## SUCTION SDP




**Construction:**  
Strong, flexible and smooth plasticized PVC.

**Application:**  
For heavy duty suction and delivery of water, light chemicals; in agricultural, industrial applications and constructions, sewer, v sludge, slurries waste matter, sand, etc.



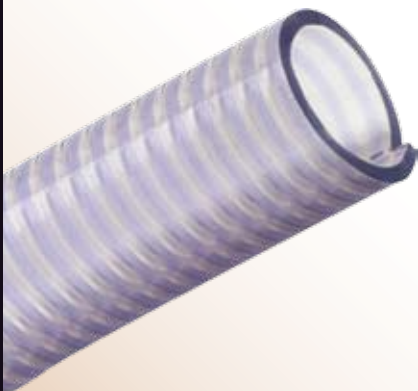



 ID (Inch)	 OD (mm)	 PSI	 VACUUM Inch.Hg	 Mind Bend Radius (mm)	 Mt
2"	60	100	29	200	50
3"	87	80	29	300	50
4"	117	75	29	500	50
5"	145	70	29	600	30
6"	170	65	29	700	30
8"	223	55	29	1300	20

## SUCTION SDA non-toxic



**Construction:**  
Strong, flexible and smooth non-toxic plasticized PVC.

**Application:**  
For delivery and suction of water, milk, fruit juices, alimentary liquids, etc.







 ID (Inch)	 OD (mm)	 PSI	 VACUUM Inch.Hg	 Mind Bend Radius (mm)	 Mt
1/2"	17	100	29	70	50
3/4"	27	120	29	80	50
1"	34	110	29	100	50
1 1/4"	40	100	29	140	50
1 1/2"	46	100	29	170	50
2"	60	100	29	220	50
3"	88	80	29	300	50
4"	115	70	29	450	50

# SUCTION WINE LIKYA



**Construction:**  
Strong, flexible and smooth plasticized non-toxic PVC.

**Application:**  
For delivery and suction of wine, liqueurs up to 15% alcohol, mineral waters, fruit juices, etc.






 ID (Inch)	 OD (mm)	 PSI	 VACUUM Inch.Hg	 Mind Bend Radius (mm)	 Mt
3/4"	27	120	29	80	50
1"	34	110	29	100	50
1 1/4"	40	100	29	140	50
1 1/2"	46	100	29	170	50
2"	60	100	29	220	50
3"	88	80	29	300	50
4"	115	70	29	450	50

# VENTILATION




Extremely light and flexible plasticized pvc.

**Application:**  
Industrial ventilation and air flow system, suction of dust, air gases, powders, liquids, etc.



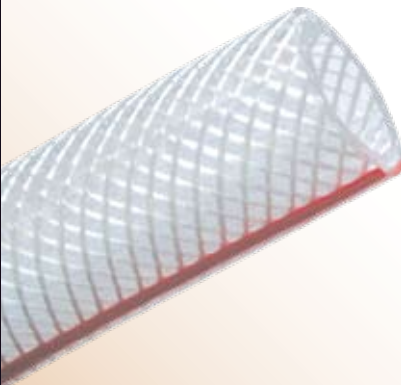


 ID (Inch)	 OD (mm)	 VACUUM Inch.Hg	 Mind Bend Radius (mm)	 Mt
1 1/4"	37	25	55	50
1 1/2"	42	25	65	50
2"	58	20	110	50
2 1/2"	68	20	130	50
3"	82	15	150	50
4"	110	15	180	30
5"	135	10	250	30
6"	160	10	350	30
8"	210	10	800	10

# OLYMPUS NON - TOXIC




**Construction:**  
Non-Toxic glass clear pvc tube and high tensile synthetic textile.

**Application:**  
For Conveying liquids, air, powdered foods, salts, light chemical.






 ID (Inch)	 OD (mm)	 PSI (WP)	 PSI (BP)	 Mt
1/4"	12	290	870	100
3/8"	16	218	653	100
1/2"	19	218	653	100
3/4"	26	145	435	100
1"	33	116	348	100
1 1/4"	40	102	305	100
1 1/2"	48	87	261	100

# AGRICULTURAL



**Construction:**  
Special PVC compound resistant to pesticides and fertilizers.

**Application:**  
For spraying of pesticides and fertilizers in agriculture






 ID (Inch)	 OD (mm)	 PSI (WP)	 PSI (BP)	 Mt
5/16"	15	1200	3480	100
3/8"	18	1200	3480	100
1/2"	21	1200	3480	100
5/16"	15	1400	4350	100
3/8"	18	1400	4350	100
1/2"	21	1400	4350	100

# FLAT



**Construction:**  
Synthetic fibers and soft PVC .

**Application:**  
Discharge of water, irrigation and floods.






 ID (Inch)	 OD (mm)	 PSI (WP)	 PSI (BP)	 Mt
2"	53.4	65	195	100
2 1/2"	66.5	60	180	100
3"	79.6	60	180	100
4"	105.1	60	180	100
6"	156.3	45	135	100

# BOSPHORUS



**Construction:**  
Strong, flexible and smooth NON-TOXIC, transparent plasticized PVC. Shock resistant galvanised spiral.

**Application:**  
Suction and delivery of water, fruit juices, liquids, etc.

 ID (Inch)	 PSI (WP)	 VACUUM (Inch.Hg)	 Mind Bend Radius (mm)	 Mt
3/4"	70	8.5	50	50
1"	70	8.5	60	50
1 1/4"	60	8.5	75	50
1 1/2"	60	8.5	90	30
2"	45	8.0	125	30
2 1/2"	35	7.0	150	30
4"	30	6.0	300	30

**SELFLEX**

European Technology

DISTRIBUTED BY